
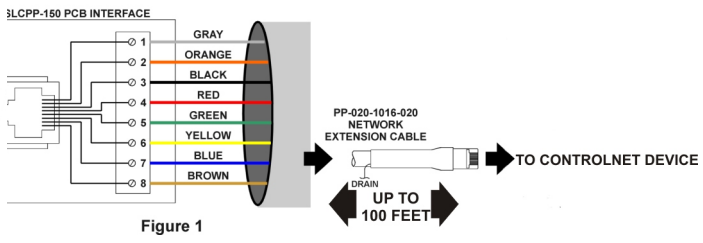


GracePort® ControlNet NAP (Network Access Port) Connector Code Data Sheet

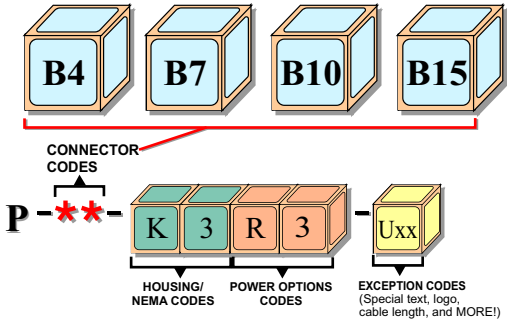

ControlNet
Network Access Port (NAP)

- No Electronics
- Optional cables: Up to 100'!

⚠ INSTALLATION

GracePorts® are intended to be mounted in or on an enclosure product. Installation should be performed by a qualified technician and adhere to applicable regulatory codes. These devices are for mounting on the flat surface of enclosures having the same type environmental ratings.

SPECIFICATIONS: ELECTRICAL
Low voltage (data), limited to 30 VDC
High voltage supply (for computer use only)
120 VAC, 15A (UL), 5A (CSA)
230-240 VAC, 16A (CE only)

SPECIFICATIONS: MECHANICAL
Housing: Cast aluminum base
Latch: Type 304 Stainless Steel (1CR18NI19)
Cover: Polycarbonate, UV rated, V-O Flame rated
Gasket: Thermoplastic elastomer
Insert Material: Acrylic UL94HB

APPROVALS

UL RECOGNIZED: E207344 (Outdoor Use)
CSA: LR110845 (not for interrupting circuit)
CE: EN61010/EN60950 (Foreign Power Outlets)



5001 Tremont Avenue
Davenport, IA 52807
(800) 280-9517 Fax: (563) 386-9639
©2007 Grace Engineered Products, Inc.
GracePort® is a registered Trademark of Grace Engineered Products, Inc.
DataSheets:ControlNet NAP:12/2007