



EXTRA-DUTY THRUVIEW™ GRACEPORT® HOUSING (M8)


The UL Listed Extra-Duty ThruView™ GracePort® M8 Housing is the essential solution for safe and efficient access to control systems in wet or damp environments. This innovative housing allows you to keep devices plugged into 15-20 Amp/125-250 Volt receptacles while the cover is securely closed, providing in-use protection against rain and moisture.

Compliant with NEC Article 406.9(B)(1), it meets the requirements for industrial “extra-duty” in-use covers in wet locations. The UL Type 3R rating, defined by UL and NEMA standards, ensures protection against rain, sleet, and snow.

Being UL Listed, it seamlessly integrates with existing UL-certified equipment, simplifying compliance for UL 508A panel shops without the need to update UL files. Customize your GracePort® with countless configurations, components, and power options to suit your specific needs. For areas exposed to routine high-pressure spray, opt for our UL Type 4/4X Thru-View® housing.





MOUNTING DIMENSIONS INCHES (MM)

HOUSING CODE	WEIGHT (OZ)	A	B	C	D	EØ
M8	17.6	4.80 ± .010 (122.0 ± .2)	3.15 ± .010 (80.0 ± .2)	5.83 ± .004 (148.0 ± .1)	2.76 ± .004 (70.0 ± .1)	.26 ± .010 (6.5 ± .2)

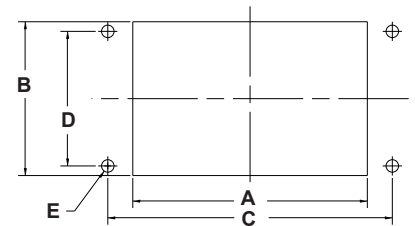

OVERALL DIMENSIONS INCHES (MM)

HOUSING CODE	F	G	H	I	K	L	MØ	NØ
M8	6.50 (165.0)	3.78 (96.0)	5.02 (127.6)	4.59 (116.7)	9.03 (229.4)	0.57 (14.4)	.45 .20 (11.5 5.2)	.26 ± .004 (6.5 ± .1)

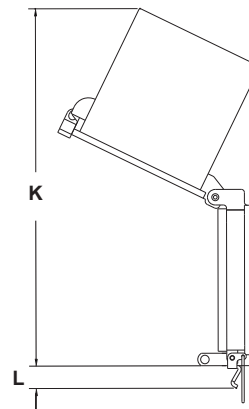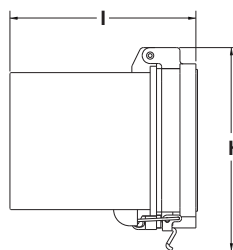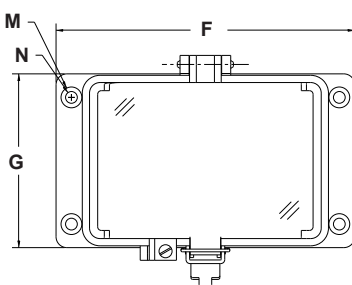

Don't see the exact configuration you're looking for?

Contact us at Sales@GraceTechnologies.com, call 1.800.280.9517 or visit GracePort.com to chat with our customer service team. We're here to help you customize your solution to meet your specific needs.

FOR MORE INFORMATION VISIT GRACEPORT.COM OR CALL 1.800.280.9517

© Grace Technologies, Inc. All rights reserved. Specifications are subject to change with/without notice.



Certification based on final product.

GP-M8-DS-EN 2410