



INSTALLATION

The JB7 Stainless Steel Housing is non-UL and intended to be mounted in or on an enclosure product. Installation should be performed by a qualified technician and adhere to applicable regulatory codes. These devices are for mounting on the flat surface of enclosures having the same type environmental ratings.


NOTE: Special care should be taken to shield sensitive components from metal shavings and/or debris

All installations:

- 1) Mark areas to be removed and cut panel opening.
- 2) Deburr any sharp edges.
- 3) Mount the housing using supplied hardware.
 - a. Hardware applicable mounting surface thickness of .059" - .250.
 - b. Hardware torque specification 10in-lb.

On units configured for optional AC power:

- 1) Connect outlet device as per code. *Note: It is the responsibility of the installer to ensure adequate separation of high and low voltage circuits in the end-use product.*

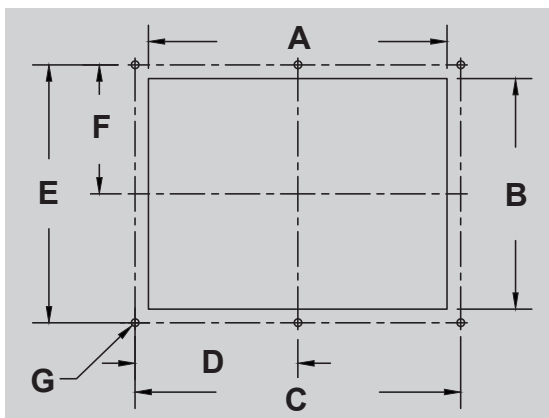

MOUNTING DIMENSIONS INCHES (MM)

HOUSING CODE	A	B	C	D	E	F	GØ
JB7	5.50 ^{+0.02} / _{-0.01} (139.7 ^{+0.5} / _{-0.2})	4.25 ^{+0.02} / _{-0.01} (108.0 ^{+0.5} / _{-0.2})	6.00 ± 0.02 (152.4 ± 0.5)	3.00 ± 0.01 (76.2 ± 0.3)	4.75 ± 0.02 (120.7 ± 0.5)	2.38 ± 0.01 (60.3 ± 0.3)	Ø0.15 ^{+0.01} / _{-0.00} (Ø3.8 ^{+0.3} / _{-0.0})

QUESTIONS

For questions or technical support, please contact us at 1-800-280-9517.